

Pincushion (revised)
1/4" seam allowance



Obviously, the inner background on this won't be red, but please keep that color in mind when choosing your strips that go around the outside.

MAKE ONE

A cut two 1 1/4" x 1 1/4"


B cut four background 1 1/4" x 1 1/4"

C cut one background 1 1/2" x 1 1/4"

D cut one background 3" x 1 1/4"

E cut two 2 1/4" x 1 1/4"

F cut one 4" x 2 1/2"

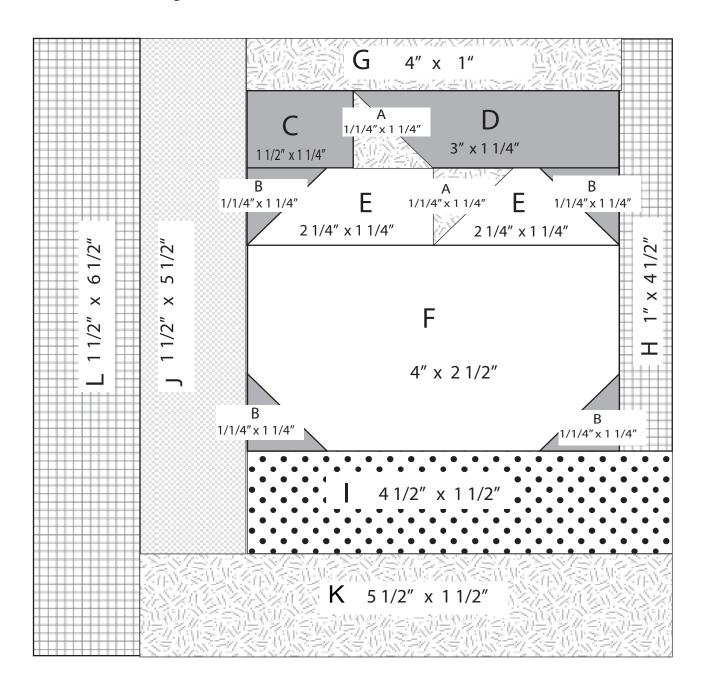


1. Place A over D, right sides together, mark diagonal line and sew, press towards A, trim seam




2. Sew C to AD




3. Place A over E, right sides together, mark diagonal line and sew, press towards A, trim seam



4. Sew other E to AE





5. Place B on both ends of EAE. mark diagonal lines and sew Press towards E, trim seams




RS

6. Place last two Bs on both bottom ends of F, mark diagonal lines and sew, press towards F,





7. Sew sections CAD, BEAEB, BFB, together. Hint: Pin top two sections to match the seams at A. Your pincushion is ready for your logs.



Stash logs

(each may be different, or mixed)

G cut one 4" x 1"

H cut one 1" x 4 1/2"

I cut one 4 1/2" x 1 1/2"

J cut one 1 1/2" x 5 1/2"

K cut one 5 1/2" x 1 1/2"

L cut one 1 1/2" x 6 1/2"

- 8. Sew G to top of pincushion press towards G
- 9. Sew H to right side of pincushion press towards H
- 10. Sew I to bottom of pincushion, press towards I
- 11. Sew J left side of pincushion press towards J
- 12. Sew K to bottom, press towards K
- 13. Sew L to left side of block, press towards L